


10 Colors | 1 Size | 3 Finishes

# ROCCO TERRAZZO PORCELAIN


**NEMO**  
TILE + STONE




WHITE MEDIUM

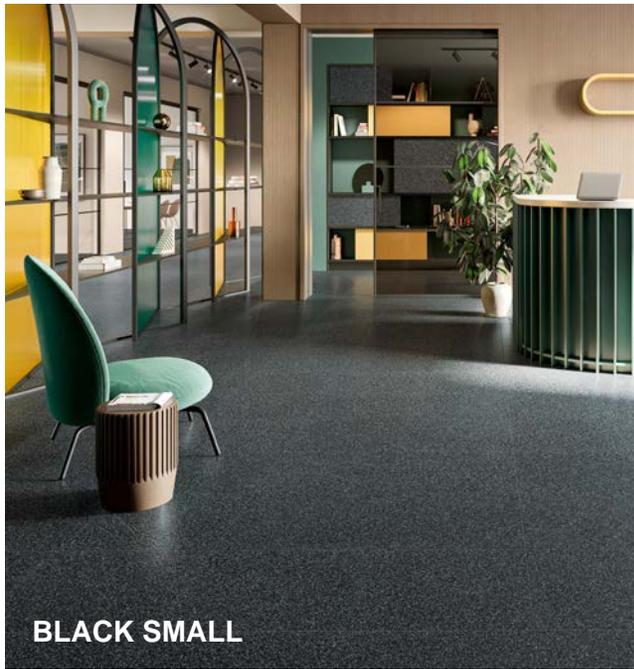

BLACK SMALL

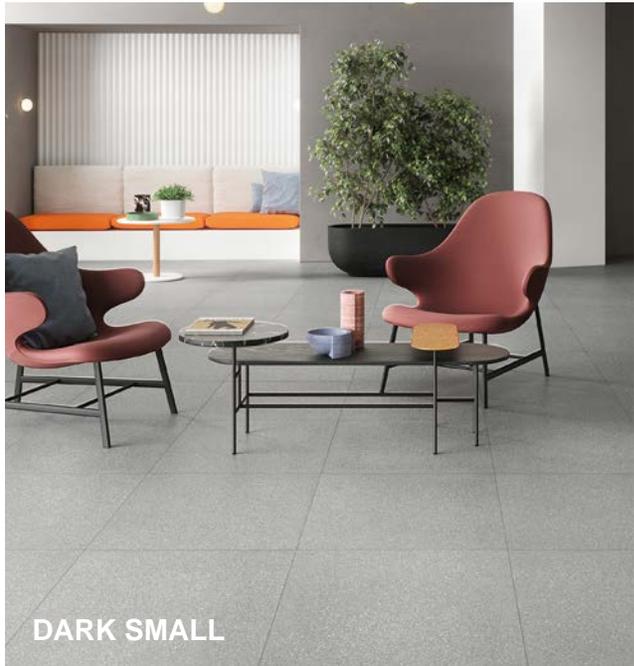

DARK SMALL

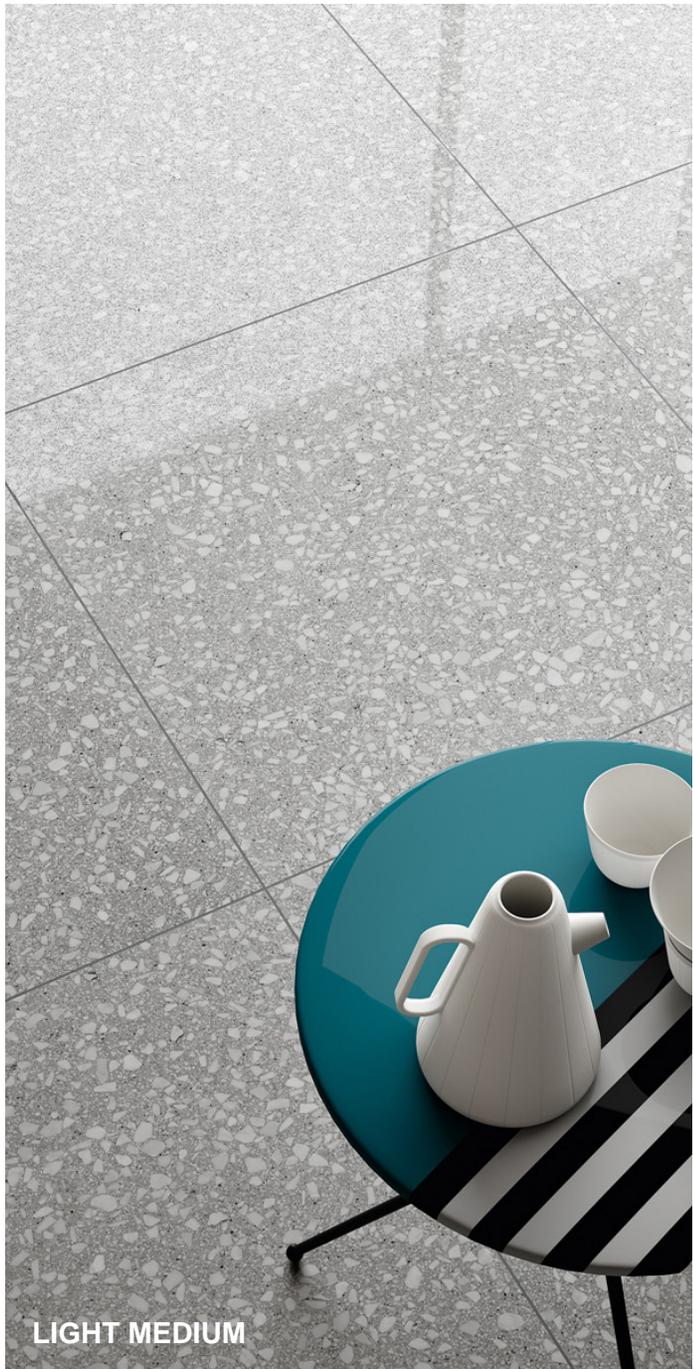


LIGHT MEDIUM

*V2 Variation | Matte, Soft, & Lappato Finish*

## ROCCO

The sophistication and charm of traditional Venetian Terrazzo are brought back to life with a contemporary twist in the Rocco collection. Venetian Terrazzo, a material resulting from the amalgamation of chips of marble, stones, cement components and natural oxides, is widespread in prestigious residences across the globe. In Rocco, irregular chips of pebbles and marble make up an even pattern packed with details. Available in small and medium grain size, in cold and warm hues.



**White Small**



**White Medium**



**Beige Small**




**Beige Medium**



**Light Small**



**Light Medium**




**Dark Small**



**Dark Medium**




**Black Small**




**Black Medium**

## Size

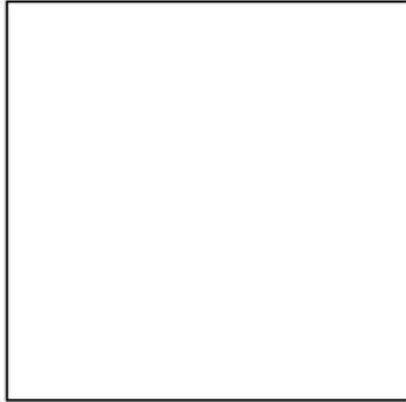

24" x 24"



2 7/8" x 24" Bullnose

## Packing Information

<b>SIZE</b>	24x24
<b>PCS/Box</b>	3
<b>SF/Box</b>	11.63
<b>LBS/Box</b>	47.06
<b>Boxes/Pallet</b>	40
<b>SF/Pallet</b>	465.3
<b>LBS/Pallet</b>	1882.75

## Technical Information

PROPERTY	STANDARD	TOLERANCE	RESULT
Length and width	ISO 10545-2	+/-0.3% max 1mm	Compliant
Thickness 9mm	ISO 10545-2	+/- 5% max 0.5mm	Compliant
Linearity	ISO 10545-2	+/-0.3% max 0.8mm	Compliant
Wedging	ISO 13006	+/-0.3% max 1.5mm	Compliant
Warpage	ISO 10545-2	+/-0.4% max 1.8mm	Compliant
Water absorption	ISO 10545-3	<0.5%	0.2%
Breaking Strength (N)	ISO 10545-4	S>1300 N	Compliant
Bending Strength (N/mm <sup>2</sup> )	ISO 10545-4	>35 N/mm <sup>2</sup>	Compliant
Coefficient of restitution	ISO 10545-5	Recommended value >0.55	Compliant
Deep Abrasion resistance	ISO 10545-7	< 175 MM <sup>3</sup>	Compliant
Coefficient of linear thermal expansion	ISO 10545-8	Testing method available	< 7 10 <sup>-6</sup> C <sup>-1</sup>
Thermal shock resistance	ISO 10545-9	Testing method available	Compliant
Moisture expansion	ISO 10545-10	Testing method available	<0.01%
Frost resistance	ISO 10545-12	Resistant	Compliant
Resistance to chemical products for housekeeping and swimming pool additives	ISO 10545-13	B min.	A
Resistance to diluted acid and alkali solutions	ISO 10545-13	Declare a class	LA
Resistance to highly concentrated acid/alkali solutions	ISO 10545-13	Declare a class	HA
Stain resistance	ISO 10545-14	UGL Declare a value	Class 5
Fire resistance	ISO 13501-1	Declare a value	A1 FL
Slip Resistance	DIN 51130	Declare a value (R)	R10 Matte
Slip Resistance	DIN 51097	Declare a value (A+B+C)	A+B Matte
Slip Resistance	BS 7976-2:2002+A1:2013	Delare a value	>36 Wet Matte
DCOF	BCRA Rep. CEC/81	Asciutto > 0.40/Bagnato>0.40	Asciutto>0.40/ Bagnato>0.40 Matte/Soft
DCOF - 1/2"x1/2"	ANSI A326.3	>0.42 Wet	> 0.42 Wet

Rocco MATTE and SOFT finishes are recommended for interior floors, walls and exterior walls in both residential and commercial applications. Rocco SOFT in not recommended for exterior horizontal surfaces or exterior paving, and is not recommended for ramps application. The SOFT finish is not recommended for interior floors in entrance areas if joined to outdoor commercial applications. Rocco LAPPATO is recommended for interior walls, and exterior walls in both residential and commercial applications. Rocco LAPPATO finish is not recommended for commercial floors