


8 Colors | 3 Sizes | 1 Finish

PASTELLI PORCELAIN MOSAIC

NEMO
TILE + STONE

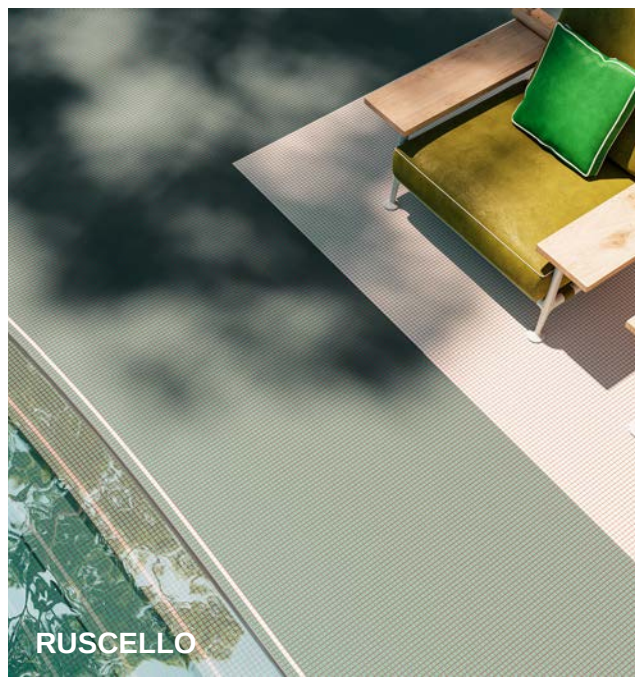

NEMO
TILE + STONE

PASTELLI
CHROMATIC LOOK PORCELAIN MOSAIC


Matte Finish

PASTELLI


Pastelli is a full-body colored porcelain collection, which starts from clay and pigmented earths, and are then pressed to compose each tile in each colors and 3 sizes, with the possibility of using contrasting joints to create modularity and decorative lines.




Osso




Ostrica




Cenere




Antracite




Conchiglia



Ruscello




Aurora




Nocciola


Sizes



1/2" x 1/2" Mosaic
12" x 12" Sheet



1/2" x 1 1/2"
12" x 12" Sheet



1" x 1"
12" x 12" Sheet

Technical Information

PROPERTY	STANDARD	TOLERANCE	RESULT
Sides	ISO 10545-2	+/-0.5%	+/-0.2%
Thickness 7.2mm	ISO 10545-2	+/- 5%	+/- 4%
Surface Qualities	ISO 10545-2	<95%	<95%
Straightness of edges	ISO 10545-2	+/-0.5%	+/-0.4%
Squareness	ISO 10545-2	+/-0.5%	+/-0.4%
Water absorption	ISO 10545-3	E<0.5% Appendice G	<0.5%
Breaking Strength (N)	ISO 10545-4	700 min. Appendice H	>1800 N
Breaking strength (LBf)	ASTM C648	>250 lbf	>250 lbf
Bending Strength (N/mm^2)	ISO 10545-4	30 min. Appendice G	> 50 N/mm^2
Impact resistance	ISO 10545-5	Testing method available	>0.6 Appendice P
Abrasion resistance	ISO 10545-7	Indicated by producer	PEI V
Coefficient of linear thermal expansion	ISO 10545-8	Testing method available	<7x10^-6/C
Thermal shock resistance	ISO 10545-9/ASTM C484	Testing method available	Guaranteed
Moisture expansion	ISO 10545-10	Testing method available	< 0.04%
Crazing resistance	ISO 10545-11/ASTM C424	Required	Guaranteed
Frost resistance	ISO 10545-12/ASTM C1026	Required	Guaranteed
Resistance to chemical products for houskeeping and swimming pool additives	ISO 10545-13	B min.	A
Resistance to diluted acid and alkali solutions	ISO 10545-13	Indicated by producer	LA
Resistance to highly concentrated acid/alkali solutions	ISO 10545-13	Testing method available	HA
Stain resistance	ISO 10545-14	Class 3 min.	3min.
Resistance of colors to sunlight	DIN 511094	Not envisaged	Guaranteed
Fire resistance	-	Decision 96/603/ce	Class A1
Coefficent of friction	DIN 51130	-	R10
Coefficent of friction	DIN 51097	-	B
DCOF - 1/2"x1/2"	ANSI A137.1	>0.42	0.6
DCOF - 1"x1"	ANSI A137.1	>0.42	0.67
DCOF - 1"x1 1/2"	ANSI A137.1	>0.42	0.78