




6 Colors | 3 Sizes | 2 Finishes

SYRENA MINIMALIST WALL TILE

NEMO
TILE + STONE




CURRENT CONCAVE

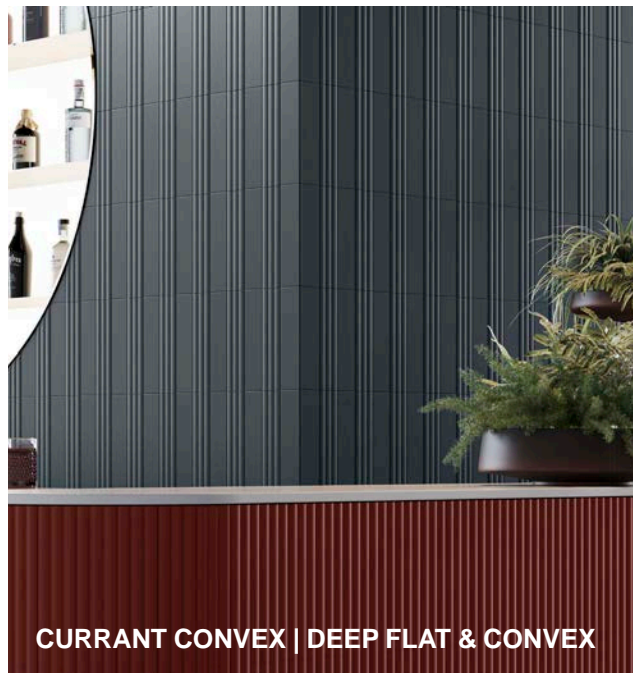

CURRENT CONVEX | DEEP FLAT & CONVEX



SAGE CONCAVE | MILK FLAT | SHELL CONVEX

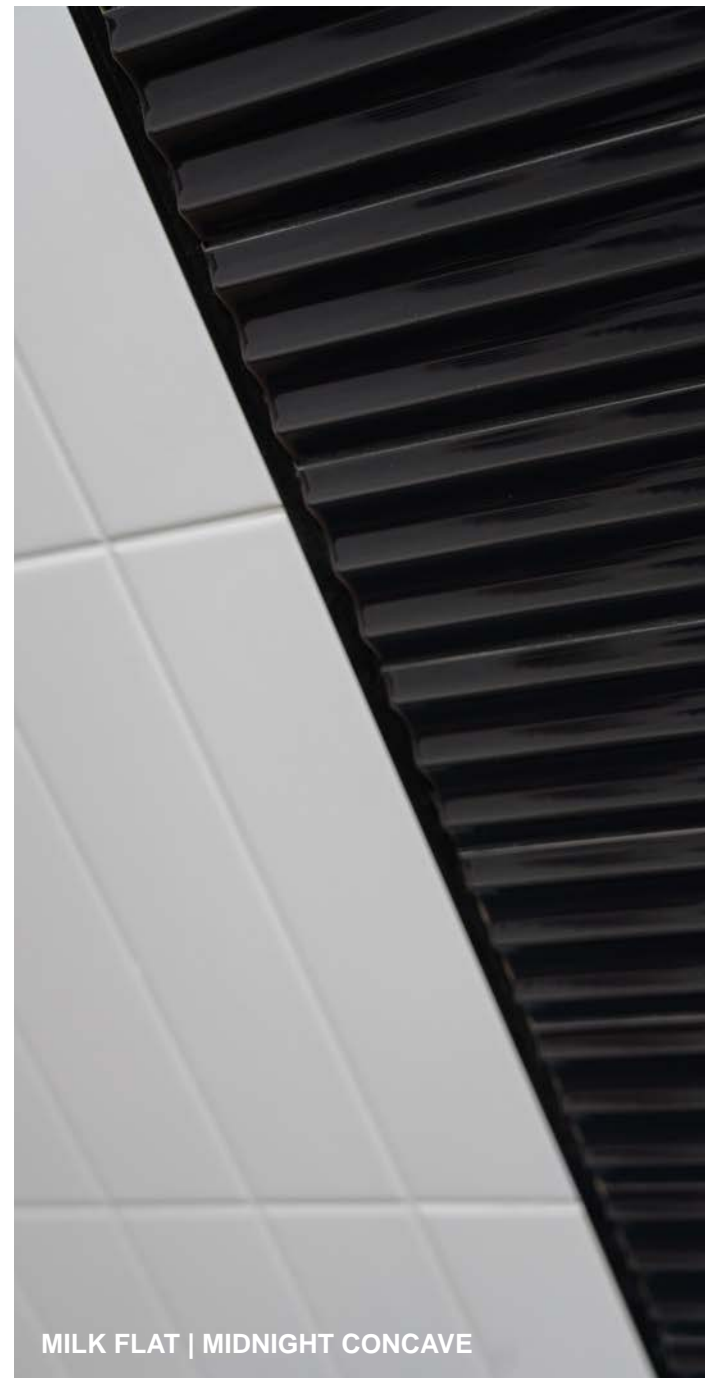

MILK FLAT | MIDNIGHT CONCAVE

V1 Variation | Glossy & Matte Finish

SYRENA

Syrena is a minimalist wall tile collection with a sculptural three-dimensionality. Available in 6 colors, the most distinctive feature of this series is the relationship between the different surfaces and finishes flat, Concave and Convex with contrasting matte and glossy finishes that come together to offer refined, contemporary combinations.




Milk



Shell



Sage

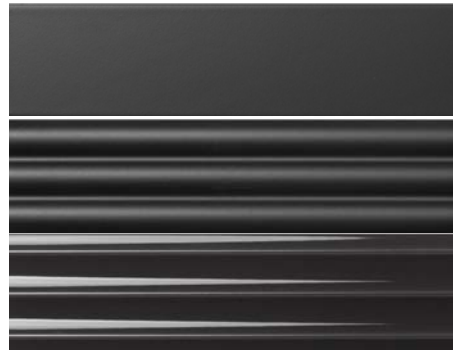

Midnight




Deep




Currant

Size

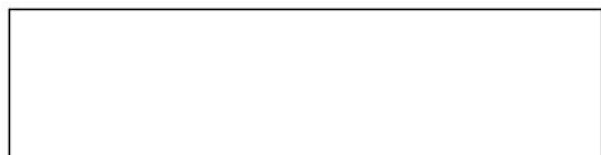

3" x 11.8"



0.5" x 11.8" Jolly



DEEP CONVEX

Technical Information

DIMENSIONS	LENGTH AND WIDTH	UNI-EN ISO 10545-2	± 0.5%	COMPLIANT
	THICKNESS	UNI-EN ISO 10545-2	± 10%	COMPLIANT
	STRAIGHTNESS OF SIDES	UNI-EN ISO 10545-2	± 0.3%	COMPLIANT
	RECTANGULARITY	UNI-EN ISO 10545-2	± 0.5%	COMPLIANT
	SURFACE FLATNESS - CENTER CURVATURE	UNI-EN ISO 10545-2	± 0.5% - 0.3%	COMPLIANT
	SURFACE FLATNESS - SIDE CURVATURE	UNI-EN ISO 10545-2	± 0.5% - 0.3%	COMPLIANT
	SURFACE FLATNESS - WARPING	UNI-EN ISO 10545-2	± 0.5%	COMPLIANT
BENDING STRENGTH	BREAKING OF RUPTURE	UNI-EN ISO 10545-4	> 600 N (≥ 7.5 MM) > 200 N (< 7.5 MM)	COMPLIANT
	MODULUS OF RUPTURE	UNI-EN ISO 10545-4	> 12 N/MM (≥ 7.5 MM) > 15 N/MM (< 7.5 MM)	COMPLIANT
RESISTANCE TO ABRASION OF GLAZED TILES		UNI-EN ISO 10545-7	-	-
WATER ABSORPTION		UNI-EN ISO 10545-3	> 10 %	COMPLIANT
COLOR RESISTANCE TO LIGHT		DIN 51094	-	RESISTANT
LINEAR THERMAL EXPANSION COEFFICIENT (100°C)		UNI-EN ISO 10545-8	TEST METHOD AVAILABLE	TEST METHOD AVAILABLE
THERMAL SHOCK RESISTANCE		UNI-EN ISO 10545-9	-	RESISTANT
FROST RESISTANCE		UNI-EN ISO 10545-12	-	-
CRAZING RESISTANCE		UNI-EN ISO 10545-11	-	RESISTANT
RESISTANCE TO STAINS		UNI-EN ISO 10545-14	CLASS 3 MIN.	CLASS 5
CHEMICAL RESISTANCE		UNI-EN ISO 10545-13	GB MIN.	GUARANTEED (GA GLA GHA)
LEAD AND CADMIUM GIVEN OFF		UNI-EN ISO 10545-15	TEST METHOD AVAILABLE	TEST METHOD AVAILABLE
REACTION TO FIRE		EN 13501-1	-	A1
SLIP RESISTANCE (RAMP TEST)		DIN 51130	-	-
SLIP RESISTANCE (PENDULUM TEST)		BS 7978-2	-	-
SLIP RESISTANCE (PENDULUM TEST)		AS/NZS 4588	-	-
WET DYNAMIC COEFFICIENT OF FRICTION (DCOF)		ANSI A137.1 - BOT 3000	-	-
SHADE VARIATION		-	-	V1

GLAZED WHITE-BODIED POROUS SINGLE-FIRED WALL TILES

Dry-pressed ceramic tiles with water absorption Eb> 10%. Quality specification, according to control test of EN14411:2013 appendix L group BIII GL